

D678I: Insafe+ Carbon LoRa

Technical Guide

21/10/21

www.nexelec.fr



1. PRESENTATION	3
1.1 INTRODUCTION TO THE PRODUCT	3
1.2 PRODUCT SCHEME.....	4
1.3 DETAILED SPECIFICATIONS.....	5
2. INSTALLATION	6
2.1 INSTALLATION LOCATIONS.....	6
2.2 DESCRIPTION OF MOUNTINGS.....	7
2.3 MOUNTING AND BRACKET	7
2.4 ACTIVATION AND COMMISSIONING PROCESS	8
3. AIR QUALITY LED INDICATORS.....	9
4. PROGRAMMABLE PUSH BUTTON	10
5. DESCRIPTION OF PAYLOAD.....	11
5.1 GENERAL DESCRIPTION.....	11
5.2 WEEKLY ANALYSIS	11
5.3 DAILY ANALYSIS	11
5.4 REAL TIME DATA	12
5.5 PRODUCT STATUS.....	15
5.6 BUTTON PRESS	17
5.7 DATALOG DATA	18
5.8 TEMPERATURE ALERTS	20
5.9 CO2 ALERTS	22
5.10 PRODUCT CONFIGURATION: FUNCTIONS RELATIVE TO CO2.....	23
5.11 PRODUCT CONFIGURATION: GENERAL FUNCTIONS.....	24
5.12 KEEPALIVE	25
5.13 RECONFIGURATION VIA DOWNLINK MESSAGE	26
6. NFC CONFIGURATION	29
6.1 NFC ANTENNA LOCATION	29
6.2 PRESENTATION OF THE APPLICATION	29
6.3 PRESENTATION OF RECONFIGURABLE DATA.....	30
7. STANDARD CONFIGURATION	30
8. PRODUCT AUTONOMY	31
9. TRACEABILITY AND MARKING	33
9.1 TRACKING LABEL	33
9.2 LoRAWAN QR CODE	34
10. MAINTENANCE AND FAILURES	34
10.1 RECALIBRATION OF CO2 SENSOR	34
10.2 CLOCK SETTING.....	35
11. REVISION HISTORY AND PRODUCT BATCH NUMBER	35
11.1 TECHNICAL GUIDE CHANGELOG	35
11.2 ASSOCIATED PRODUCT BATCH NUMBER	36

1. Presentation

1.1 Introduction to the product

INSAFE+ CARBON

Carbon dioxide detector and indoor air quality monitor



INSAFE+ Carbon is a new generation carbon dioxide detector that also includes a temperature and humidity sensor. INSAFE+ Carbon is not simply a CO2 sensor. Thanks to its « Edge Computing » architecture and its IZIAIR embedded algorithm, INSAFE+ Carbon calculates an indoor air quality index to help you take appropriate actions.

INSAFE+ Carbon is also a connected physical button that you can program with two different actions (short or long press) and an intuitive light feedback.

It is an ideal product for connected homes, residential or tertiary buildings and public establishments (schools, nurseries, leisure centers, retirement homes, etc.).

Product benefits:

- > 3-in-1 carbon dioxide detector, Indoor Air Quality monitor and push button
- > IZIAIR Indoor Air Quality Indicator
- > Wireless sensor for easy and fast installation
- > 10-year battery life for the product and wireless connection
- > Elegantly designed detector

Applications:

- > Control of indoor air quality in residential premises and public places
- > Control of HVAC system
- > Maintenance optimization
- > Improvement of building energy efficiency
- > Development of new services: home care assistance, well-being, heating cost savings, etc.

Basic functions:

- > Measurement of CO₂, temperature and humidity every 10 minutes
- > Programmable push button
- > Air quality measurement and instant display with indicator lights:
 - Green: Optimal air quality
 - Orange: Moderate air quality
 - Red: Poor air quality

Advanced features:


- > Reconfigurable Product via NFC with NFC Configuration Tool application
- > IZIAIR indoor air quality index (5 levels)
- > Residual battery life
- > Functional self-test (every 10 min.)
- > Optimized message transmission: alert management on thresholds, keepalive, datalogging, etc.

FAQ and support

More information on our website www.nexelec.fr/support

If you need help, contact us by email at support@nexelec.fr

1.2 Product scheme

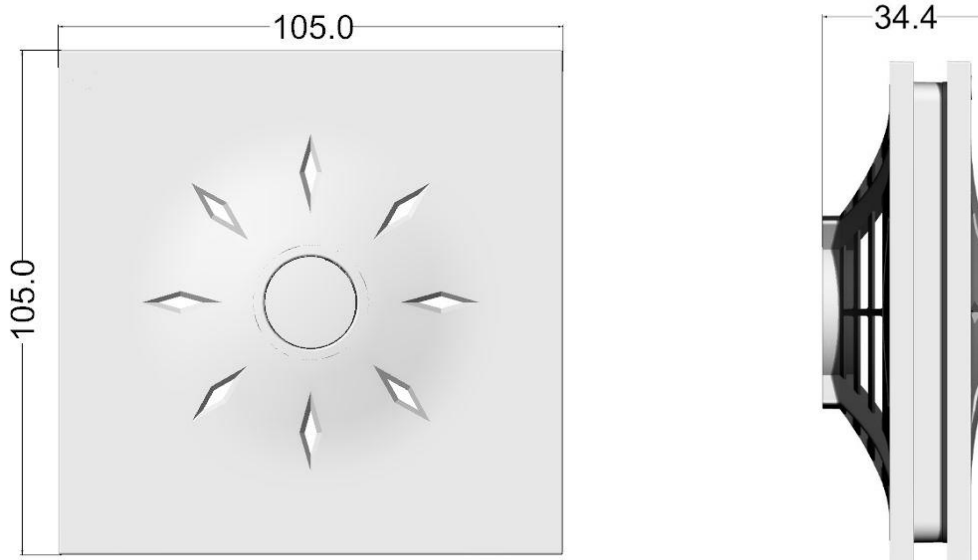

1.3 Detailed specifications

Product terms of use

- > Indoor household environment
- > Temperature: 0°C to + 50°C
- > Relative humidity: from 0 to 95% RH (non-condensing)

Sensors and measurements:

		CO2	Temperature	Humidity
Accuracy	Typical		±0.3 °C	±2 %RH
	Max	±50 ppm +/- 3% of the value	±0.4 °C	±3 %RH
Resolution		20 ppm	0.2 °C	0.5 %RH
Measuring range		0 – 5000 ppm	0 – 50 °C	0 – 100 %RH
Measuring period		10 min	10 min	10 min

Certifications

The product is compatible with the following directives and standards:

Directives

- Radio Equipment Directive (RED) 2014/53/EU
- 2011/65/EU (RoHS) Directive

Standards :

- EN 62368-1
- EN 301 489-1 V2.2.0
- EN 301 489-3 V2.1.1
- EN 300 220-2 V3.2.1
- EN 62479 : 2010

2.Installation


2.1 Installation locations

Recommended locations in a domestic or tertiary environment

It is recommended to install the detector:

- Less than 1 meter above the ground if the detector is placed on an item of furniture or a shelf (using the mobile mounting base delivered with the detector)
- Less than 1.5 meters above the ground if the detector is wall mounted (attached with screws and wall plugs)

In order to obtain accurate and reliable data, we suggest you follow recommended locations.

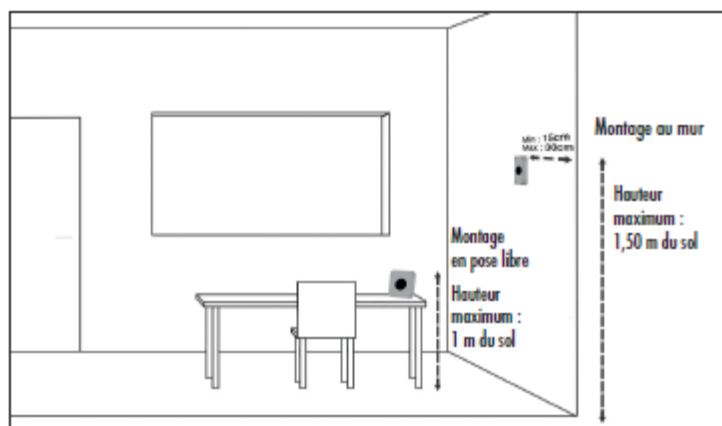


Locations to avoid


Do not install the indoor air quality monitor:

- Less than 30 cm from the ceiling
- Outdoors
- In a location where the temperature is less than 10°C or more than 50°C
- In a location where humidity levels is more than 95% (bathroom, kitchen, laundry room, etc.)
- In a dusty or dirty location (garage, workshop, etc.)
- Less than 1 m from doors and windows, heating, cooling or air vents
- In a narrow area where the detector could be damaged
- In a contained location (e.g. in a cupboard or behind a curtain)
- In a location where the detector could be blocked (e.g. by furniture)

2.2 Description of mountings

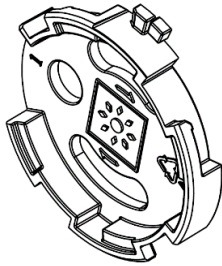

Mounting base for wall-mounted

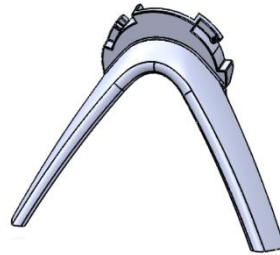


Mobile mounting base for standalone mounting

2.3 Mounting and bracket

Attaching the detector to a wall

Use the mounting base and the screws and wall plugs provided with the detector.

The product can also be mounted using the adhesive attachments.

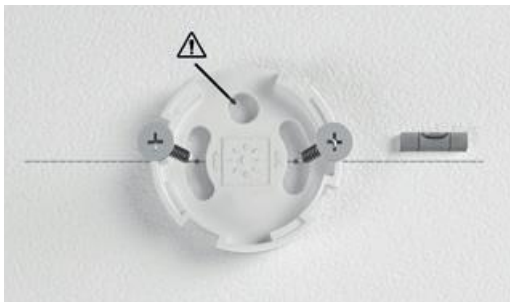

Comply with the following procedure:

- > Select an appropriate location to secure the detector to the wall
- > Remove the mounting base from the detector
- > Mark the preferred location of screw holes on the wall using a pencil. The drawing inside the base shows the final position of the detector when attached. (3)
- > Insert the nylon wall plugs provided and screw on the mounting base (4)
- > Place your detector on the mounting base and then rotate a quarter turn to the right to secure. You should hear a «click», indicating that your detector is secured in its mounting base (5)
- > Check that your detector is securely fitted to the wall

Standalone mounting

Use the mobile mounting base supplied with the detector.

Comply with the following procedure:

- > Place the detector on an item of furniture or a shelf, less than 1 meter above the ground, to prevent any damage if the detector accidentally falls.
- > Place your mobile mounting base on the back of the detector and then rotate a quarter turn to the right to secure. You should hear a «click», indicating that your detector is secured in its mobile mounting base.



2.4 Activation and commissioning process

Activation


To commission your monitor, activate the single-use switch (1)



Initial commissioning

The orange LED will blink during the join process (max 25 seconds). The green LED will remain ON during the initializing period (maximum 1 minute) if the process has been successful, in red otherwise.

If the initial commissioning failed, the product will automatically retry once. In case of failure, the product will then follow the commissioning strategy described below (Refer to Commissioning strategy in case of initial failure).

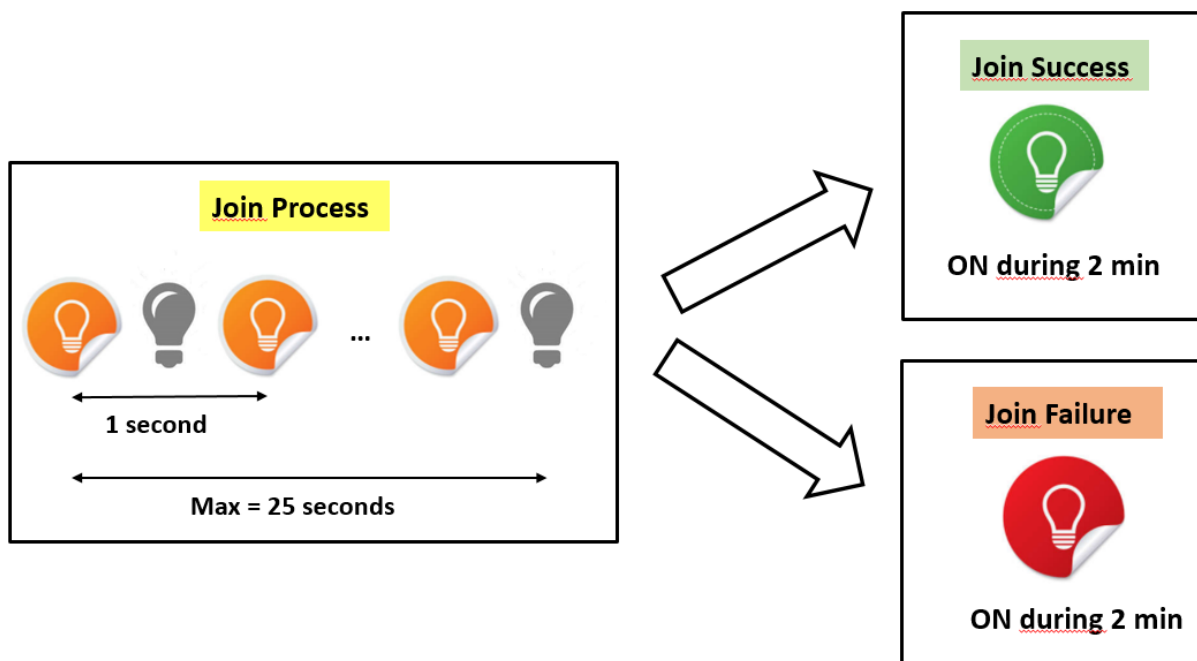

Product configuration and coverage analysis process

If the commissioning process is successful, the product will send its configuration (refer to section 5.11 Product configuration: general functions and 5.10 Product configuration: functions relative to CO₂), its status (refer to section 5.5 Product status) and 9 keepalive frames with about 10 seconds between each frame. This process intends to provide enough data for radio coverage analysis.

Commissioning strategy in case of initial failure

If the initial commissioning process failed, the product will automatically try to join the network with an increasing period between each try:

1st retry will occur 20 minutes after initial commissioning.

2nd retry will occur 40 minutes after 1st try.

3rd retry will occur 80 minutes after 2nd try.

....

In case of failure, the product will then try to join the network every 24h.

Schedule a recommissioning

You can schedule a join request. The typical use case is when you want to switch from a server to another. This function is available through downlink command. A confirmation message is sent to confirm the activation of the scheduling (Product status message, join request pending bit).

Commissioning strategy in case of network cut-off




In the event of network cut-off, the product will automatically try to rejoin the network 3 days after the disconnection. If this recommissioning process failed, the product will automatically try to join the network with an increasing period (as described in the “Commissioning strategy in case of initial failure” section).

3.Air quality LED indicators

INSAFE+ Carbon measures temperature, relative humidity and carbon dioxide (CO₂) levels every 10 minutes.

The CO₂ level, produced naturally through breathing, is a good indicator of containment level.

INSAFE+ Carbon calculates an index that assesses the quality of air renewal.

LED	Flashing Period (sec)	CO ₂ level* (ppm)	Indoor Air Quality	Analysis and recommended actions
	3	> 1700	Bad The air renewal is too low	The concentration of carbon dioxide is too high. Ventilate the room right now and check the ventilation systems to improve indoor air quality
	3	1000 – 1700	Poor The air renewal is low	The concentration of carbon dioxide is high. Ventilate the room to improve indoor air quality
	600	< 1000	Excellent Optimal conditions	Measurements are good, indoor air quality seems ideal!

*: These CO₂ levels can be reconfigured (See section 5.13.Reconfiguration via downlink message and section 6.NFC configuration)

Note: The orange LED, indicating a poor air quality, can be deactivated via downlink message or via NFC.

4. Programmable push button

INSAFE+ Carbon has a programmable push button that enables to launch scenarios (heating, ventilation, presence, etc.) when the product is integrated into a connected ecosystem.

After a **short press** (< 1 second), led corresponding to the last indoor air quality is ON during 3 seconds (refer to table above for details on led indicators). A message is sent containing the type of button press and generating the triggering of appropriate actions (see section 5.6 Button press).

After a **long press** (> 2 second), red-orange-green LED flashes to indicate that the press has been considered. A full measurement is done (CO2 + temperature + humidity) and sent (see section 5.4 Real Time Data).

A **multiple press (3 times)** generates an OTAA join request. No message of « Button press » type is sent.

A **multiple press (6 times)** generates a recalibration of the CO2 sensor (See section 10.1 Recalibration of CO2 sensor). No message of « Button press » type is sent.

5.Description of payload

5.1 General description

Insafe+ Carbon is a configurable product to measure CO₂, temperature, humidity and to analyze indoor air quality. Insafe+ Carbon includes advanced features such as real time measurement, datalogging, alert management, etc.

In order to optimize battery life, management of messages and subscriber fees on network, the functions can be activated, deactivated and configured.

ID Message	Details of the function	Transmission of message	Can be deactivated	Configurable
0	Weekly analysis	Periodic	Yes	TBD
1	Daily analysis	Periodic	Yes	TBD
2	Real time data	On event	Yes	Yes
3	Product status	On event	No	No
4	Button press	On event	Yes	No
5	Datalog Data	Periodic	Yes	Yes
6	Temperature Alerts	On event	Yes	Yes
7	CO ₂ Alerts	On event	Yes	Yes
8	Product Configuration CO ₂ functions	On event	No	No
9	Product Configuration General functions	On event	No	No
10	Keepalive	Periodic	Yes	Yes

5.2 Weekly analysis

This function will be implemented and documented later.

5.3 Daily analysis

This function will be implemented and documented later.

5.4 Real Time Data

The real-time function is very convenient to know the instant CO2, temperature and humidity values while preserving the autonomy of the product.

The product measures environmental data every 10 minutes and a real-time message containing the last CO2, temperature and humidity data is sent at least every 120 minutes. If one of the measurements (CO2, temperature, humidity) changes significantly within period of 120 minutes, a message is immediately sent by the device.

The default values of significant change, called “delta” are the following:


- Delta CO2: 150ppm
- Delta Temperature: 0.5°C
- Delta Humidity: 5.0%RH

Example

The chart below shows the evolution of the CO2 data and the associated sending of message.

Configuration:

- Sending period = 120 minutes
- Delta CO2 = 150 ppm

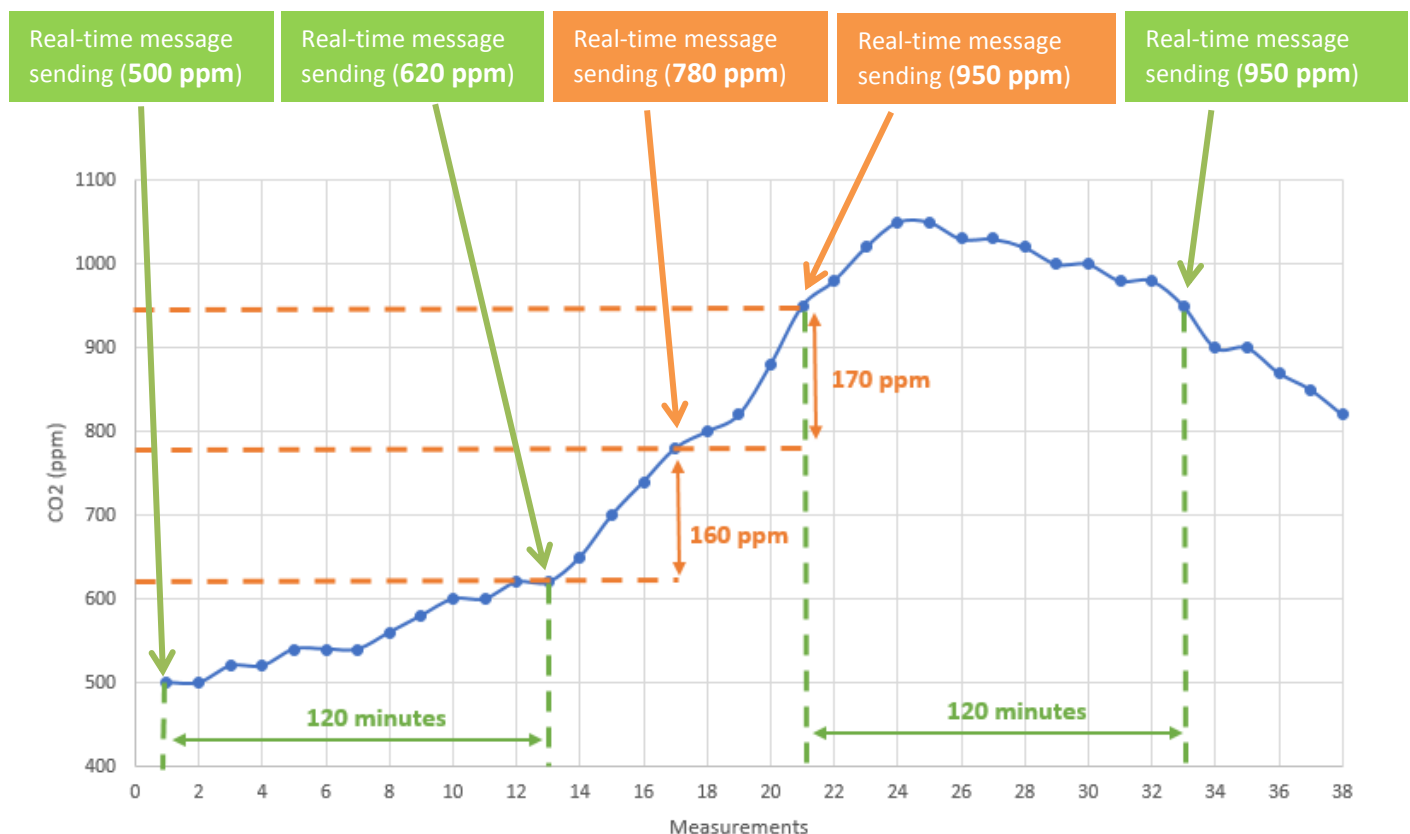

The sending period and also the different delta (CO2 / temperature / humidity) can be reconfigured separately via NFC (See section 6.NFC configuration) or downlink (See section 5.13.Reconfiguration via downlink message).

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Product Type	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Real-Time Data	0x2		
8	8	DB1.7 DB1.0	CO2 level	CO2 level (linear), increment = 20ppm	0 - 250 255	0-5000 Error	ppm
16	8	DB2.7 DB2.0	Temperature	Temperature (linear), increment = 0,2°C	0-250 255	0-50°C Error	°C
24	8	DB3.7 DB3.0	Relative Humidity	Relative humidity (linear), increment = 0.5%RH	0-200 255	0-100 Error	% RH
32	3	DB4.7 DB4.5	IAQ_GLOBAL	IZIAIR global air quality index	0: Excellent 1: Good 2: Fair 3: Poor 4: Bad 5...6: Reserved 7: Error		
35	4	DB4.4 DB4.1	IAQ_SRC	IZIAIR Data source	0:All 1:Drought Index 2:Mold Index 3:Mite Index 4:CO 5:CO2 ... 15:Error		
39	3	DB4.0 DB5.6	IAQ_CO2	CO2 Air Quality	0: Excellent 1: Good 2: Fair 3: Poor 4: Bad 5...6: Reserved 7: Error		
42	3	DB5.5 DB5.3	IAQ_DRY	Drought Index Air Quality	0: Excellent 1: Good 2: Fair 3: Poor 4: Bad 5...6: Reserved 7: Error		
45	3	DB5.2 DB5.0	IAQ_MOULD	Mold Index Air Quality	0: Excellent 1: Good 2: Fair 3: Poor 4: Bad		

					5...6: Reserved 7: Error
48	3	DB6.7 DB6.5	IAQ_DM	Mite Index Air Quality	0: Excellent 1: Good 2: Fair 3: Poor 4: Bad 5...6: Reserved 7: Error
51	2	DB6.4 DB6.3	HCI	Hygrothermal comfort Index	0: Good 1: Fair 2: Poor 3: Error
53	3	DB6.2 DB6.0	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7

Example :

Raw Frame : 726a75508b0000

Decoded Frame :

- Product Type: 0x7 → Insafe+ Carbon LoRa
- Message Type: 0x2 → Real Time Data
- CO₂ Level: 0x6a → 2120 ppm
- Temperature: 0x75 → 23.4°C
- Relative Humidity: 0x50 → 40 %RH
- IZIAIR Index: 0x4 → Bad
- IZIAIR Source: 0x5 → CO₂
- IAQ CO₂ : 0x4 → Bad
- IAQ DRY : 0x0 → Excellent
- IAQ MOULD : 0x0 → Excellent
- IAQ DM : 0x0 → Excellent
- HCI : 0x0 → Good
- Frame index : 0x0 → Frame n°0

5.5 Product status

This message is sent every 7 days or when one of this information changes:

- Battery level indication is defined using 4 levels:
 - o High level: More than 40% remaining battery capacity
 - o Medium level: 10-40% remaining battery capacity
 - o Low level: 5-10% remaining battery capacity
 - o Critical level: Less than 5% remaining battery capacity
- Product Hardware status (HW)
- Level of CO2 auto-calibration
- Product activation time-counter
- Join request pending status

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Product Information	0x3		
8	2	DB1.7 DB1.6	Battery level	Battery level	0: High 1: Medium 2: Low 3: Critical		
10	1	DB1.5	Product HW status	Status of HW	0: Hardware OK 1: Hardware fault 0: HW working correctly 1: HW fault detected ?		
11	3	DB1.4 DB1.2	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7		
14	1	DB1.1	Pending Join	Join request scheduled	0: No join request scheduled 1: Join request scheduled		
15	1	DB1.0	Not Used	Not Used	Not Used		
16	8	DB2.7 DB2.0	Product activation time-counter	Cumulative duration of product activation	0 - 250	0 - 250	month
					255	Error	
24	8	DB3.7 DB3.0	CO2 autocalibration value	See section Recalibration of CO2 sensor	0 - 250	0- 5000	ppm
					255	Error	

32	6	DB4.7 DB4.2	Product date	Year (since 2000)	0-63	0-63	Year
38	4	DB4.1 DB5.6	Product date	Month	1-12	1-12	Month
42	5	DB5.5 DB5.1	Product date	Day	1-31	1-31	Day
47	5	DB5.0 DB6.4	Product date	Hour	0-23	0-23	Hour
52	6	DB6.3 DB7.6	Product date	Minute	0-59	0-59	Minute
58	6	DB7.5 DB7.0	Not Used	Not Used	Not Used		

Example :

Raw frame : 73000A124d28fb40

- Type of product: 0x7 → Insafe+ Carbon LoRa
- Type of message: 0x3 → Product Information
- Battery level: 0x0 → High
- Product HW status: 0x0 → OK
- Frame index : 0x0 → Frame n°0
- Pending Join : 0x0 → No join request scheduled
- Product activation time-counter: 0x0A → 10-month cumulative activation
- CO2 auto-calibration value: 0x12 → 360 ppm
- Product date:
- Year: 0x13 → 2019
- Month: 0x4 → Avril
- Day: 0x14 → 20
- Hour: 0x0F → 15h
- Minute : 0x2D → 45 minutes

5.6 Button press

If this function has been activated, (see section 6 NFC) a message is sent at each:

- Short button press
- Long button press

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Button press	0x4		
8	3	DB1.7 DB1.5	Button press	Type of button press	0: short press		
					1: Reserved for Nexelec		
					2: Reserved for Nexelec		
					3: Reserved for Nexelec		
					4..7: Reserved		
11	3	DB1.4 DB1.2	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7		
14	2	DB1.1 DB1.0	Not Used	Not Used	Not Used		

Example :

Raw frame : 7400

Decoded frame :

- Type of product: 0x7 → Insafe+ Carbon LoRa
- Type of message: 0x4 → Button press
- Type of button press: 0x0 → Short press
- Frame index : 0x0 → Frame n°0

5.7 Datalog data

The Datalog function enables to gather 3 measurements into a single message. This function is very convenient to have periodic data while preserving the autonomy of the product.

You can set up the period between the measurements (10 / 30 / 60 minutes) via the NFC application (see section 6 NFC) or via downlink (see section 5.13 Reconfiguration via downlink message).

Data are sent in the following format:

The oldest data are referred to [n-2], then [n-1]. The data [n] correspond to current data.

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Message datalog	0x5		
8	8	DB1.7 DB1.0	CO2 Concentration [n-2]	Concentration CO2 (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255	Error	
16	8	DB2.7 DB2.0	Temperature [n-2]	Temperature (linear), increment = 0,2°C	0-250	0°C / +50°C	°C
					255	Error	
24	8	DB3.7 DB3.0	Relative Humidity [n-2]	Relative Humidity (linear), increment = 0.5%RH	0-200	0-100	% RH
					255	Error	
32	8	DB4.7 DB4.0	CO2 Concentration [n-1]	CO2 Concentration (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255	Error	
40	8	DB5.7 DB5.0	Temperature [n-1]	Temperature (linear), increment = 0,2°C	0-250	0°C / +50°C	°C
					255	Error	
48	8	DB6.7 DB6.0	Relative Humidity [n-1]	Relative Humidity (linear), increment = 0.5%RH	0-200	0-100	% RH
					255	Error	
56	8	DB7.7 DB7.0	CO2 Concentration [n]	CO2 Concentration (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255	Error	
64	8	DB8.7 DB8.0	Temperature [n]	Temperature (linear), increment = 0,2°C	0-250	0°C / +50°C	°C
					255	Error	
72	8				0-200	0-100	% RH

		DB9.7 DB9.0	Relative Humidity [n]	Relative Humidity (linear), increment = 0.5%RH	255	Error	
80	4	DB10.7 DB10.4	Time between the measurements	Time with 10 minute increments between the measurement n and n+1	0 - 15	0-150	min
84	3	DB10.3 DB10.1	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7		
87	1	DB10.0	Not Used	Not Used	Not Used		

Example:

Raw Frame: 751a674d186a4c196f4a6e

Decoded frame:

- Type of product: 0x7 → Insafe+ Carbon LoRa
- Type of message: 0x5 → Datalog message
- CO2 Concentration [n-2] : 0x1A → 520 ppm
- Temperature [n-2] : 0x67 → 20.6°C
- Relative Humidity [n-2] : 0x4D → 38.5 %RH
- CO2 Concentration [n-1]: 0x18 → 480 ppm
- Temperature [n-1]: 0x6A → 21.2°C
- Relative Humidity [n-1] : 0x4C → 38.0 %RH
- CO2 Concentration [n]: 0x19 → 500 ppm
- Temperature [n] : 0x6F → 22.2°C
- Relative Humidity [n] : 0x4A → 37.0 %RH
- Time between the measurements: 0x6 → 60 minutes
- Frame index : 0x7 → Frame n°7

5.8 Temperature alerts


This function enables to send a message when the temperature reaches one of the two configurable alert thresholds (see section 6 NFC). A hysteresis (typical value of 0.5°C) is applied below each threshold to avoid too many messages.

An activation message is sent when the temperature measured is higher than the threshold set.

A deactivation message is sent when the temperature measured dropped by 0.5°C below the threshold set.

At the start-up product phase, a message is sent with thresholds (activation / deactivation) current state.

Example of operation:

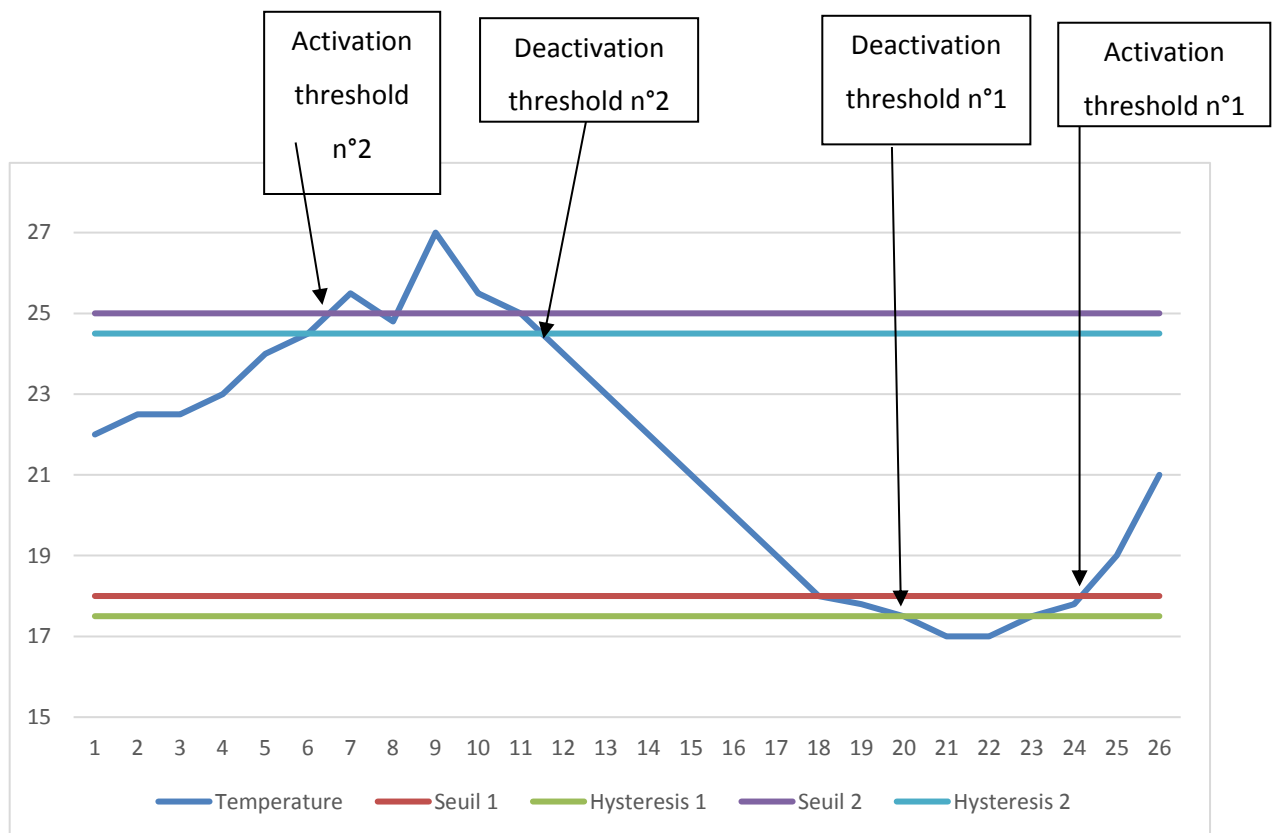

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Temperature alert	0x6		
8	8	DB1.7 DB1.0	Temperature	Temperature (linear), increment = 0.2°C	0-250 255	0°C / +50°C Error	°C
16	1	DB2.7	T_TH1	Temperature threshold n°1	0: threshold 1 not reached 1: threshold 1 reached		
17	1	DB2.6	T_TH2	Temperature threshold n°2	0: threshold 2 not reached 1: threshold 2 reached		
18	3	DB2.5 DB2.3	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7		
21	3	DB2.2 DB2.0	Not Used	Not Used	Not Used		

Raw Frame: 7673c0

Decoded frame:

- Type of product: 0x7 → Insafe+ Carbon LoRa
- Type of message: 0x6 → Temperature alert
- Temperature :0x73 → 23.0°C
- T_TH1: threshold 1 reached
- T_TH2: threshold 2 reached
- Frame index : 0x0 → Frame n°0

5.9 CO2 Alerts

This function enables to send a message when the CO2 concentration reaches one of the two configurable alert thresholds (1000 and 1700ppm by default).

An activation message is sent when the concentration measured is higher than the threshold set. A deactivation message is sent when the concentration measured dropped below the threshold set.

At the start-up product phase, a message is sent with thresholds (activation / deactivation) current status.

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	CO2 Alerts	0x7		
8	8	DB1.7 DB1.0	CO2 Concentration	CO2 Concentration (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255: Error		
16	3	DB2.7 DB2.5	Frame index	Frame Index is a loop counter to check if a frame has been lost	0-7		
19	1	DB2.4	CO2 threshold 1	CO2 threshold 1 (1000 ppm)	0: threshold 1 not reached 1: threshold 1 reached		
20	1	DB2.3	CO2 threshold 2	CO2 threshold 2 (1700 ppm)	0: threshold 2 not reached 1: threshold 2 reached		
21	3	DB2.2 DB2.0	Not used	Not used	Not used		

Raw Frame: 773710

Decoded frame:

- Type of product: 0x7 → Insafe+ Carbon LoRa
- Type of message: 0x7 → CO2 Alert
- CO2 Concentration: 0x37 → 1100 ppm
- Frame index : 0x0 → Frame n°0
- CO2 threshold 1: threshold 1 reached
- CO2 threshold 2: threshold 2 not reached

5.10 Product configuration: functions relative to CO2

At the start-up product phase or during each reconfiguration, a message is sent to indicate the configuration of the product.

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Product Configuration (CO2)	0x8		
8	8	DB1.7 DB1.0	CO2 threshold 1	CO2 Concentration (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255	Error	
16	8	DB2.7 DB2.0	CO2 threshold 2	CO2 Concentration (linear), increment = 20ppm	0 - 250	0 - 5000	ppm
					255	Error	
24	6	DB3.7 DB3.2	Smart Period 1	Start time of the period (30-minute increment)	0-47	0h00 - 23h30	Hours
30	6	DB3.1 DB4.4	Smart Period 1	Duration of the period (30-minute increment)	0-48	0 - 24	Hours
36	6	DB4.3 DB5.6	Smart Period 2	Start time of the period (30-minute increment)	0-47	0h00 - 23h30	Hours
42	6	DB5.5 DB5.0	Smart Period 2	Duration of the period (30-minute increment)	0-48	0 - 24	Hours
48	1	DB6.7	Smart Period 1	Active?	0: Non-active; 1: Active		
49	1	DB6.6	Smart Period 1	Active on Monday?	0: Non-active; 1: Active		
50	1	DB6.5	Smart Period 1	Active on Tuesday?	0: Non-active; 1: Active		
51	1	DB6.4	Smart Period 1	Active on Wednesday?	0: Non-active; 1: Active		
52	1	DB6.3	Smart Period 1	Active on Thursday?	0: Non-active; 1: Active		
53	1	DB6.2	Smart Period 1	Active on Friday?	0: Non-active; 1: Active		
54	1	DB6.1	Smart Period 1	Active on Saturday?	0: Non-active; 1: Active		
55	1	DB6.0	Smart Period 1	Active on Sunday?	0: Non-active; 1: Active		
56	1	DB7.7	Smart Period 2	Active?	0: Non-active; 1: Active		
57	1	DB7.6	Smart Period 2	Active on Monday?	0: Non-active; 1: Active		
58	1	DB7.5	Smart Period 2	Active on Tuesday?	0: Non-active; 1: Active		
59	1	DB7.4	Smart Period 2	Active on Wednesday?	0: Non-active; 1: Active		
60	1	DB7.3	Smart Period 2	Active on Thursday?	0: Non-active; 1: Active		
61	1	DB7.2	Smart Period 2	Active on Friday?	0: Non-active; 1: Active		
62	1	DB7.1	Smart Period 2	Active on Saturday?	0: Non-active; 1: Active		
63	1	DB7.0	Smart Period 2	Active on Sunday?	0: Non-active; 1: Active		

64	8	DB8.7 DB8.0	Altitude	Altitude (used for measurement compensation), increment = 50m	0 - 200	0 - 10000	m
----	---	----------------	----------	--	------------	--------------	---

5.11 Product configuration: general functions

At the start-up product phase or during each reconfiguration, a message is sent to indicate the configuration of the product.

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Product general Configuration	0x9		
8	1	DB1.7	IQA LED	Activate LED function?	0: Non-active; 1: Active		
9	1	DB1.6	Button Notif.	Notification active button press?	0: Non-active; 1: Active		
10	1	DB1.5	Real Time Data	Active Real Time Data ?	0: Non-active; 1: Active		
11	1	DB1.4	Datalog	Active datalog function?	0: Non-active; 1: Active		
12	1	DB1.3	Temperature Alerts	Active temperature alerts ?	0: Non-active; 1: Active		
13	1	DB1.2	CO2 Alerts	Active CO2 alerts?	0: Non-active; 1: Active		
14	1	DB1.1	Keepalive	Active Keepalive function	0: Non-active; 1: Active		
15	1	DB1.0	Orange LED	Orange LED activated?	0: Non-active; 1: Active		
16	8	DB2.7 DB2.0	Meas. Period	Period between two measurements (CO2, temperature, humidity)	0 - 250	0 - 250	min.
					255	Error	
24	8	DB3.7 DB3.0	Datalog decimation	Datalog decimation factor (keep only 1 measurement among x)	0 - 255	0 - 255	NA
32	8	DB4.7 DB4.0	threshold n°1 Temperature alert	Temperature (linear), increment = 0.2°C	0-250	0°C +50°C	°C
					255	Error	
40	8	DB5.7 DB5.0		Temperature (linear), increment = 0.2°C	0-250	0°C +50°C	°C

			threshold n°2 Temperature alert		255	Error	
48	8	DB6.7 DB6.0	Delta_Temp	Temperature Delta generating the transmission of a «real time» message	0-250	0°C +25°C	°C
					255	Error	
56	8	DB7.7 DB7.0	Delta_Hum	Humidity Delta generating the transmission of a «real time» message	0-200	0-100	% RH
					255	Error	
64	8	DB8.7 DB8.0	Delta_CO2	CO2 Delta generating the transmission of a «real time» message	0 - 250	0 - 5000	ppm
					255	Error	
72	8	DB9.7 DB9.0	Keepalive	Keepalive Period (h)	0 - 250	0 - 250	hours
80	8	DB10.7 DB10.0	SW Version	Software version of the product	0 - 255	0 - 255	-
88	2	DB11.7 DB11.6	NFC status	Status of NFC configuration interface	0: Discoverable 1: Not discoverable 2..3: RFU		
90	6	DB11.5 DB11.0	Real-time message sending period	Maximum time between two real-time messages sending	1 - 63	10 - 630	Min.

5.12 Keepalive

This message is sent by the product on a regular basis to check its correct functioning. The sending period of this message is configurable (see section 6 NFC).

Data are sent in the following format:

Offset	Size (bit)	Bit-range	Data	Description	Valid Range	Scale	Unit
0	4	DB0.7 DB0.4	Type of product	Insafe+ Carbon LoRa	0x7		
4	4	DB0.3 DB0.0	Type of message	Keepalive Message	0xA		

5.13 Reconfiguration via downlink message

Product can be reconfigured via downlink message in response to any uplink message. The downlink message must be sent on port 0x56.

Reconfiguration acknowledgement

After reconfiguration, the product will send a message with its updated configuration (5.11 Product configuration: general functions and 5.10 Product configuration: functions relative to CO2).

Downlink message structure

First byte is the header: 0x55.

Then the following bytes can be used to reconfigure the product with respect to the format: Command ID and DATA.

Note: Downlink functionalities will certainly progress in the future. To ensure backwards-compatibility, Nexelec recommends sending the IDs from the lowest to the highest value.

ID	Data length (byte)	Range	Scale	Description
0x00	-	-	-	No change, can be used for padding (Sigfox for example)
0x01	0	-	-	Ask for general configuration of the product (message Configuration of product functions)
0x02	0	-	-	Ask for CO2 configuration of the product message Configuration: functions relative to CO2
0x03	1	0 / 1	0 : disabled 1 : enabled	LED enable
0x04	1	0 / 1	0 : disabled 1 : enabled	Button enable
0x05	1	0 / 1	0 : disabled 1 : enabled	Real Time Value enable
0x06	1	0 / 1	0 : disabled 1 : enabled	Datalog enable
0x07	1	0 / 1	0 : disabled 1 : enabled	Temperature Alert enable
0x08	1	0 / 1	0 : disabled 1 : enabled	CO2 Alert enable
0x09	1	0 / 1	0 : disabled 1 : enabled	Keepalive enable
0x0A	1	0 / 1	0 : disabled 1 : enabled	NFC interface enable
0x0B	1	1 - 9	1 – 9	Datalog decimation factor
0x0C	2	0 - 500	0 – 50°C	Temperature alert: Threshold 1 Temperature by step of 0.1°C
0x0D	2	0 - 500	0 – 50°C	Temperature alert: Threshold 2 Temperature by step of 0.1°C
0x0E	1	0 - 99	0 – 9.9°C	Temperature Delta generating the transmission of a «real time» message

0x0F	1	0 - 19	0 – 9.5%RH	Humidity Delta generating the transmission of a «real time» message
0x10	1	0 - 250	0 – 5000ppm	CO2 Delta generating the transmission of a «real time» message
0x11	1	1 – 99	1 – 99h	Keepalive period (hours)
0x12	1	0 - 250	0 – 5000ppm	CO2 Threshold 1 for Indoor Air Quality LED indicators and CO2 Alert CO2 by step of 20 ppm
0x13	1	0 - 250	0 – 5000ppm	CO2 Threshold 2 for Indoor Air Quality LED indicators and CO2 Alert CO2 by step of 20 ppm
0x14	3	See description below		Smart Period n°1 config
	Byte 0.7 MSB	0 / 1	0 : disabled 1 : enabled	Smart period On/Off
	Byte 0.6	0 / 1	0 : disabled 1 : enabled	Monday On / Off
	Byte 0.5	0 / 1	0 : disabled 1 : enabled	Tuesday On / Off
	Byte 0.4	0 / 1	0 : disabled 1 : enabled	Wednesday On / Off
	Byte 0.3	0 / 1	0 : disabled 1 : enabled	Thursday On / Off
	Byte 0.2	0 / 1	0 : disabled 1 : enabled	Friday On / Off
	Byte 0.1	0 / 1	0 : disabled 1 : enabled	Saturday On / Off
	Byte 0.0 LSB	0 / 1	0 : disabled 1 : enabled	Sunday On / Off
	Byte 1	0 – 47	0 – 23h30	Starting time of the period in 30 minutes step
	Byte 2	0 - 48	0 – 24h	Duration of the period in 30 minutes step
0x15	3	Same as above		Smart Period n°2 config
0x16	1	0 - 250	0 – 1000m	Altitude (used for CO2 level correction)
0x17 ¹	6	See description below		RTC configuration (product will reboot after configuration)
	Byte 0	0 - 100	2000 – 2100	year, starting from 2000 (value = 0)
	Byte 1	1 – 12	1 – 12	month, starting from January (value = 1)
	Byte 2	1 - 31	1 – 31	day of the month
	Byte 3	0 – 23	0 – 23	Hours
	Byte 4	0 – 59	0 – 59	Minutes
	Byte 5	0 - 59	0 - 59	Seconds
0x18 ¹	2	See description below		Relative clock configuration (product will reboot after configuration)
	Byte 0	0 / 1	0: Backward time slot increasing 1: Forward time slot increasing	Backward/forward RTC time slot increasing
	Byte 1	0 - 250	0 – 250 minutes	Number of minutes to add/remove to the current RTC date
...				Reserved
0x1C	2	1 - 1008	10 – 10080 minutes	Schedule a join request in x minutes

...				Reserved
0x27	1	0 / 1	0: Orange Led working 1: Orange Led deactivated	Orange Led deactivation
...				Reserved
0x49	1	1 - 63	10 – 630 minutes	Maximum time between two “real-time” messages sending
...				Reserved
0xFF				Reserved

Note 1: product will reboot after configuration

Examples

Example 1:

- Activate Real time values
- Delta temperature = 0.5°C
- Delta Humidity = 9.5%RH

Frame structure, from LSB to MSB:

Byte	Value	Info
0	0x55	Header for 1- message reconfiguration
1	0x05	ID Real time value enable
2	0x01	Value to enable real time message
3	0x0E	ID for delta temperature
4	0x05	Value for 0.5°C
5	0x0F	ID for delta humidity
6	0x13	Value for 9.5%RH

Example 2:

- Activate Smart Period n°1:
 - o Monday, Tuesday, Thursday, Friday
 - o From 8.30am to 4.30pm (duration = 8 hours)

Frame structure, from LSB to MSB:

Byte	Value	Info
0	0x55	Header for 1- message reconfiguration
1	0x14	ID Smart Period n°1
2	0xEC	Select the appropriate days and enable function
3	0x11	Starting time (8.30am = 17 steps of 30 minutes)
4	0x10	Duration (8 hours = 16 steps of 30 minutes)


6.NFC configuration

The NFC interface can be deactivated via downlink message. By this way, the NFC memory is no more discoverable and placing the product in the face of the product has no effect. A deactivation of the NFC memory avoids a reconfiguration of the product once deployed.

After being deactivated, the NFC interface can be re-activated again via downlink message.

6.1 NFC antenna location

In the face of the product, place the “do not paint” icon at the top left (standard position when mounting the product in accordance with the instructions given previously).

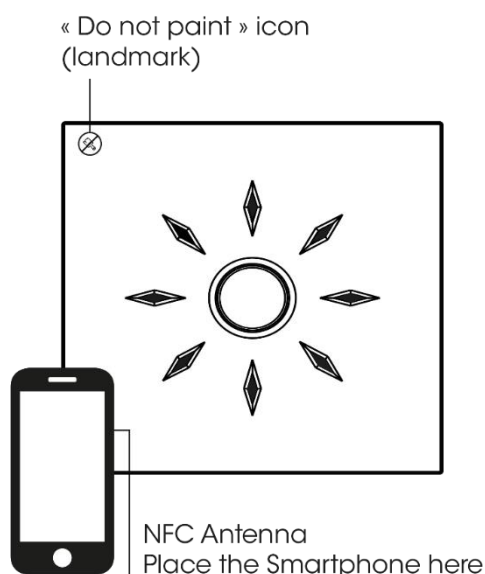

6.2 Presentation of the application

The « Nexelec Config Tool » product reconfiguration application is available in Android for devices (mobile, tablet) equipped with NFC interface.



Nexelec Config Tool

NEXELEC R&D

Outils

DÉSINSTALLER

OUVRIR

6.3 Presentation of reconfigurable data

Following parameters are configurable:

- LED: enabled/disabled
- Orange LED: enabled / disabled
- CO2 thresholds
- Button: enabled / disabled
- Real Time values: delta CO2 / delta Temperature / delta humidity / sending period
- Datalog: measuring period
- Temperature alerts: Temperature thresholds 1 and 2, Temperature hysteresis
- CO2 alerts
- Altitude (used for measurement compensation)
- Smart Period
- Keepalive

7. Standard configuration

When the product is delivered, the standard configuration is the following:

Function	Status
Button	Activated
LED	Activated with following parameters: CO2 threshold 1: 1000 ppm CO2 threshold 2: 1700 ppm
Real time data	Activated with following parameters: Delta CO2: 150ppm Delta Temperature: 0.5°C Delta Humidity: 5.0%RH Sending period: 120 minutes
Datalog	Deactivated
Temperature alert	Deactivated
CO2 alert	Deactivated
Smart Periods	Deactivated
Altitude compensation	Activated with following parameters: Altitude: 100m
Keepalive	Activated with following parameters: Period: 24h

Using this standard configuration, the product will have 7 years estimated lifetime (see section Product autonomy for more information).

8. Product autonomy

The product is powered by a non-chargeable and non-replaceable battery. When the battery is empty, the green LED blinks every 10 seconds indicating the product must be replaced.

The product autonomy depends on the LED switch-on time that indicates air quality (see section 3 Air quality LED indicators). The more the LED will be switched-on, the lower the autonomy. The product autonomy also depends on the number of messages sent.

The table below helps you evaluate the number of messages sent based on the functions that have been activated in the product:

Function	Average number of messages sent per day
Product Status	0.15
Keepalive 6h	4
Keepalive 12h	2
Keepalive 24h	1
Datalog 10min	48
Datalog 30min	16
Datalog 60min	8
Real-time data	The product measures environmental data every 10 minutes. If the value (T °, CO2 or humidity) has changed significantly, a message will be sent. The number of messages depends on the product environment (see note 1)
Temperature alert	The product sends a message each time the temperature reaches a defined threshold. The number of messages depends on the product environment (see note 1)
CO2 alert	The product sends a message each time the CO2 level reaches a defined threshold. The number of messages depends on the product environment (see note 1)

Note 1: These functions depend on environmental conditions. The table below gives an example of the number of messages in office conditions.

Function	Number of messages per day
Real time data Temperature delta : 0.5°C CO2 delta : 150 ppm Humidity delta: 5% RH Sending period = 120 minutes	25
Real time data Delta Température : 1.0°C Delta CO2 : 250 ppm Delta Humidité : 5% RH Sending period = 120 minutes	15
Temperature Alerts	4
CO2 Alerts	4

In LoRa, the network can define parameters like datarate and output power to optimize the device battery power consumption (See Adaptive Data Rate description in LoRaWan specification).

Two tables are built to show the best case and the worst case depending on the network:

- Best case: Output power = 2dBm, Spreading factor: SF7
- Worst case: Output power = 14dBm, Spreading factor: SF12

The tables below show the product autonomy according to two criteria:

- LED switch-on time that indicates air quality
- Number of messages sent per day

Number of messages / days	0	10	20	50	100	140
Time spent in degraded air quality (poor / bad) (h/day)	Autonomy (year)					
0	10	10	10	7.5	4.5	3.5
1	10	10	10	7	4.5	3.5
2	10	10	9.5	6.5	4.5	3.5
4	10	9.5	8.5	6	4	3.5
8	8.5	7.5	6.5	5	3.5	3
12	6.5	6	5.5	4.5	3.5	2.5
24	4	4	3.5	3	2.5	2

Autonomy for Insafe+Carbon with SF12, 14dBm output power (Worst case)

Number of messages / days	0	10	20	50	100	140
Time spent in degraded air quality (poor / bad) (h/day)	Autonomy (year)					
0	10	10	10	10	10	10
1	10	10	10	10	10	10
2	10	10	10	10	10	10
4	10	10	10	10	10	10
8	8.5	8.5	8.5	8	8	7.5
12	6.5	6.5	6.5	6.5	6.5	6
24	4	4	4	4	4	4

Autonomy for Insafe+Carbon with SF7, 2dBm output power (Best case)

You can increase the autonomy of your product by switching off the LED function as well as the communications during specific periods of the week (LED functions and/or Smart Period : 6.3 Presentation of reconfigurable data).

9.Traceability and marking


Three labels and a QR Code are located at the back of the product.



Labels at the back of the product

9.1 Tracking label

This label is placed both at the back of the product and on the packaging.

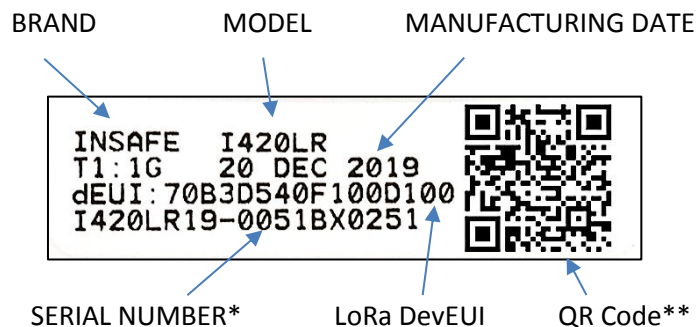

*Serial number format:

I420LR	19	-	00	51	BX	0251
Model	Year	Reserved	Week of production	Batch	Number in batch	

**QR Code:

Format: **Serial number**; **Testbench**; **Date**; LoRa DevEUI

Example: **I420LR19-0051BX0251**; **1G**; **201219**; 70B3D540F100D100

9.2 LoRaWAN QR Code

A QRCode compatible with the LoRa Alliance standard (LoRaWAN® Device Identification QR Code) is placed both at the back center of the product and on the packaging.

Example :



Device Schema version: D0
AppEUI: 70B3D540F5A8B680
DevEUI: 70B3D540F352942
Owner Token: FFFF0420
Serial number: SI420LR21-0532FF0045

10.Maintenance and failures

10.1 Recalibration of CO2 sensor

Why calibrate the product?

The measurement of CO₂ level is performed through an infrared sensor technology (NDIR: non-dispersive infrared). This optical technology has a drift that the product automatically compensates by using an ABS (Automatic Baseline Correction) method. This allows to cast off maintenance and to maintain performances throughout the lifetime of the product.

This method is efficient and reliable in an usual environment, where the CO₂ rate reaches its minimum level (400ppm) for a few hours (at night for premises, in the day in a bedroom).

Steps to follow

The calibration is automatically performed every 8 days. You can also do a manual calibration.

To do this:

- > Place the product outdoors or close to an open window
- > Position your product for at least 2 minutes in this environment
- > Press the product middle button 6 times within 3 seconds

The green LED lights up during the entire product calibration process (for about 8 seconds). Once the LED is off, the recalibration is over.

10.2 Clock setting

The product has a clock allowing the operation of the Smart Period. This clock drifts very slightly (about 5 minutes/year) in domestic conditions (20-25°C).

Product clock must be configured via downlink (See 5.13 Reconfiguration via downlink message) or using « Nexelec Config Tool » application (See “Reconfiguration via NFC” section of this documentation for general information on NFC) :

- >Launch “Nexelec Config Tool” NFC application
- >Select “Product Info” tab and then press on « Sync. Date »
- >Bring the product closer to synchronize the phone clock
- >The product automatically restarts and takes into account this new clock.

11.Revision History and product batch number

11.1 Technical guide changelog

Document revision	Details	Date
A	Created	10/05/2019
B		26/08/2019
C	Add information about standard configuration Add information about battery levels Update product behaviour following long press on button	24/10/2019
D	Add information relative to product autonomy	12/11/2019
E	Add information on Activation and commissioning process Update information on temperature and humidity accuracy	27/02/2020
F	Add information about tracking label	11/03/2020
G	Update power consumption (LED change) Add reconfiguration via downlink commands	31/08/2020
H	Add new functions: <ul style="list-style-type: none"> - Activation/Deactivation of NFC interface - Indoor air quality indicators: activation/deactivation of orange LED (Poor level) - Relative clock configuration - Configuration of CO2 thresholds (for LED indicators and CO2 alerts) 	02/03/2021
I	<ul style="list-style-type: none"> - CO2 hysteresis have been deleted (previously ± 100ppm) - Improved battery management: green led blinks every 10 seconds when battery is empty - Automatically Join after 3 days without network connection 	21/10/2021

	Add new functions: <ul style="list-style-type: none"> - Add periodic transmission configuration on Real-time messages 	
--	--	--

11.2 Associated product batch number

Use the table below to know the functionalities implemented in your product. To understand better the serial number format, refer to section Tracking label.

Technical guide revision	Product Code	Revision starting from serial number
A..F	/	I420LRxx-xxxxAAxxxx
G	/	I420LRxx-xxxxCCxxxx
H	00	I420LRxx-00xxCOxxxx
	05	I420LRxx-05xxDPxxxx
I	00	I420LRxx-00xxDAxxxx
	05	I420LRxx-05xxFZxxxx