

INSAFE

Smoke detector

Discover product in details



Design

Facilitates acceptance of the detector by residents



10-year battery ⁽²⁾

Sealed and welded lithium battery



Digital detector logbook

QR Code + application for monitoring installation and maintenance of a fleet of detectors

Nexelec

Universally compatible mounting base ⁽¹⁾


Simplifies replacement of other brands of detectors without drilling new mounting holes

Rip-off protection

Lockable mounting base to reduce the risk of detector removal

Reduce false alarms

Electronic self-compensation for dust in the detection chamber

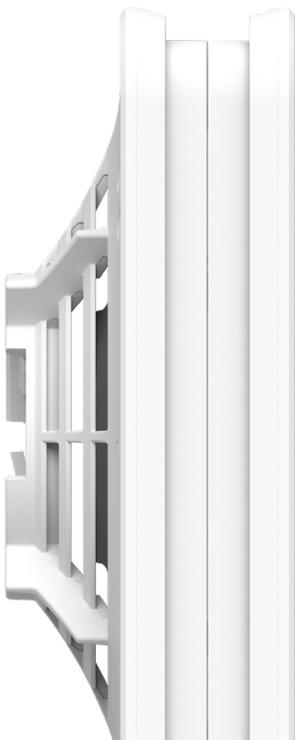

Compatible with 3M adhesive mounting ⁽¹⁾

CE and NF approved for installation without screws or plugs. No need to drill hazardous substrates (asbestos)

Test / Silence button

Large, easy-to-reach touch button on front panel

Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base

Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface



INSAFE

Smoke detector

Nexelec

www.nexelec.eu

Reference	Battery
X730FW	10 ans



Net weight: 150 g (including battery and stand)

FUNCTIONS



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Air 360°

Exclusive detection technology. Simplifies maintenance by residents



Insect barrier

Pest protection grid integrated into the detector



Powerful audible alarm

85 dB at 3 metres to quickly alert occupants



8-hour beep delay

Temporarily silences fault beeps until detector is replaced

FEATURES

Smoke

Technology: Photoelectric smoke detector
Optical smoke detection by diffused light (Tyndall effect)

Terms of use

Indoor environment
Temperature: -10°C to +50°C
Humidity: 0% RH to 99% RH (non-condensing)

Mounting type

Wall or ceiling

Set contents

1 detector
1 mounting base
2 nylon screws and plugs
1 user manual

Certification

EN14604

NF292



Warranty ⁽³⁾

5 years

⁽¹⁾ Optional accessory or function available on request. ⁽²⁾ The battery is designed for a non-guaranteed life of 10 years; battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual. ⁽³⁾ Please refer to the «Warranty» section of the user manual.