

INSAFE+

Smoke detector

Discover product in details



Design

Facilitates acceptance of the detector by residents

Digital logbook detector follow-up



QR Code + Application for monitoring installation and maintenance of a fleet of detectors



Electronic certificate maintenance

After each maintenance operation, a unique certificate is recorded in the detector's secure NFC chip

Nexelec

Universally compatible mounting base⁽¹⁾


Simplifies replacement of other brands of detectors without drilling new mounting holes

Rip-off protection

Lockable mounting base to reduce the risk of detector removal

Reduce false alarms

Electronic self-compensation for dust in the detection chamber

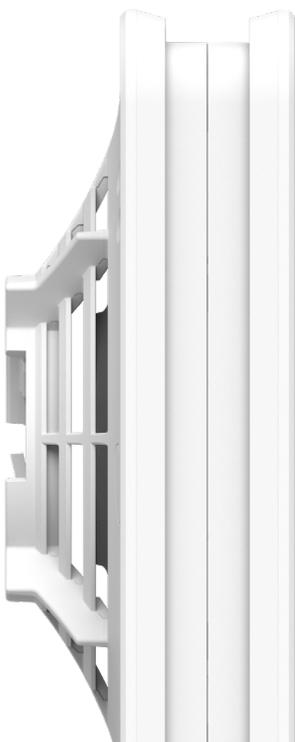

Compatible with 3M adhesive mounting⁽¹⁾

CE and NF approved for installation without screws or plugs. No need to drill hazardous substrates (asbestos)

10-year battery⁽²⁾

Sealed and welded lithium battery

Test / Silence button

Large, easy-to-reach touch button on front panel

Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base

Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface



INSAFE+

Smoke detector

Nexelec

www.nexelec.eu

Reference	Battery
X760FW	10 ans



Net weight: 150 g (including battery and stand)

FUNCTIONS



Air 360°

Exclusive detection technology. Simplifies maintenance by residents



Insect barrier

Pest protection grid integrated into the detector



Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



Powerful audible alarm

85 dB at 3 metres to quickly alert occupants



8-hour beep delay

Temporarily silences fault beeps until detector is replaced

FEATURES

Smoke

Technology: Photoelectric smoke detector
Optical smoke detection by diffused light (Tyndall effect)

Terms of use

Indoor environment
Temperature: -10°C to +50°C
Humidity: 0% RH to 99% RH (non-condensing)

Mounting type

Wall or ceiling

Set contents

1 detector
1 mounting base
2 nylon screws and plugs
1 user manual

Certification

EN14604



Warranty ⁽³⁾

5 years

⁽¹⁾ Optional accessory or function available on request ⁽²⁾ The battery is designed for a non-guaranteed life of 10 years; battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual.

⁽³⁾ Please refer to the «Warranty» section of the user manual.